

Suspended distributor for use in the medicine/healthcare sector

Different requirements demand products that can be used flexibly, especially in medical technology. When every second counts, everything must function smoothly. Energy from the air or suspended above the workplace is practical and quickly available when it is needed. To complement our range, which has been specially designed for use in the healthcare sector, we offer two different versions of suspended distributors below.


Application

In areas used for medical purposes in group 0, 1 and 2 in accordance to the SN HD 60364-7-710 standard

Product features

- tested according to:
EN 60601-1 (Medical electrical equipment),
SN HD 60364-7-710 (Requirements for premises, rooms and installations of a special nature – areas used for medical purposes),
EN 61439-1 (Low-voltage switchgear and controlgear assemblies)
- protection category IP20
- IP20 socket outlet available with and without hinged cover

Hospital suspended distributor
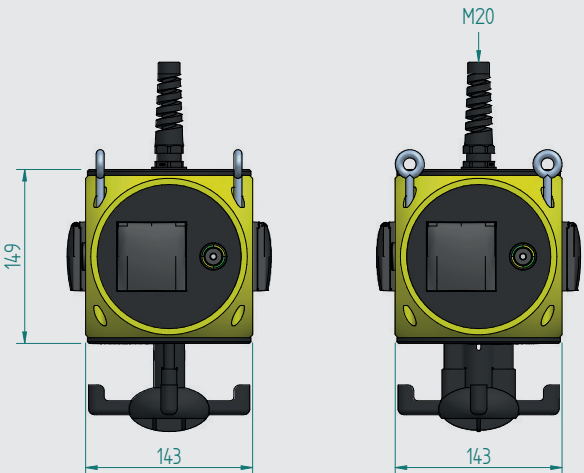
| | |
|--|--|
|  | |
| Item no. | 259184 |
| Designation | Hospital suspended distributor |
| Output | 4×T13 4×POAG |
| Input | 2.5m Hospital equipment cord set 3×1.5mm², plug type 12 vulcanized |
| Max. pre-fuse | 13A |
| Housing material | plastic |
| Protection category | IP20 |
| Housing colour | yellow/black |
| Dimensions | 143×149×143 mm |
| Remarks | excl. suspension (order separately, see accessories) |




Accessories

- 011886 ✓ Chain V2A ø2/12mm
- 038537 ✓ Carabiner hook V4A stainless steel 40mm/4mm with tooth latch
- 167265 ✓ Suspension kit galvanized steel (l=300mm)
- 031122 ✓ UP cover frame size 1, anthracite, IP20
- 254046 ✓ UP cover frame size 1, with hinged cover, anthracite, IP20



Hospital suspended distributor with Balancer

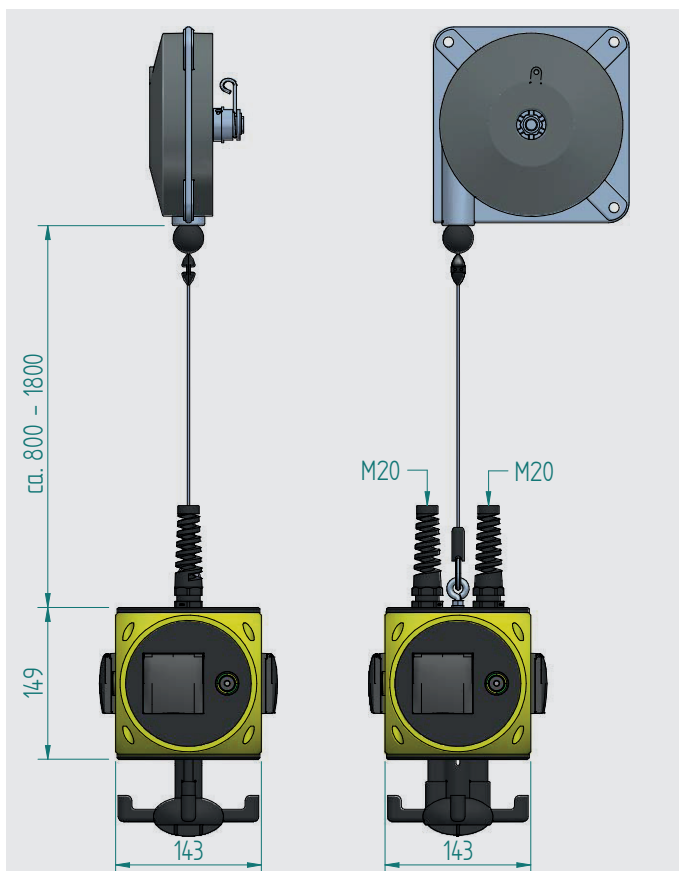

Balancer

- die-cast aluminium frame
- stainless steel suspension cable
- height-adjustable
- continuous load adjustment from maximum to minimum
- adjustable lift limiter
- additional safety suspension



| | |
|---------------------|--|
| Item no. | 258840 |
| Designation | Hospital suspended distributor with Balancer |
| Output | 4×T13 4×POAG |
| Input | 2m Double spiral cable: <ul style="list-style-type: none"> – 1×6.0mm² PE with connection POAG – 3×1.5mm² with plug type 12 |
| Max. pre-fuse | 13A |
| Housing material | plastic |
| Protection category | IP20 |
| Housing colour | yellow/black |
| Dimensions | 143×149×143 mm |
| Remarks | Suspension by means of balancer |

Accessories

031122 ✓ UP cover frame size 1, anthracite, IP20

254046 ✓ UP cover frame size 1, with hinged cover, anthracite, IP20

