

SYSTEMATIC QUALITY

# CAMPETTO

## Underfloor power distributor system



**GIFAS**  
ELECTRIC

Thanks to the Underfloor power distributor system from GIFAS electrical power is available everywhere without complicated temporary installations! As with all products, we give much importance to high-quality components and workmanship.

Whether installed in- or outdoor, we provide customised solutions that will not disappoint you!

**Benefits of our system:**

- electrical power is available anytime and just in seconds
- no power cable lying around, therefore no stumbling
- temporary installations are no longer needed
- easy and quick closing after use
- automatic opening thanks to gas springs
- suitable for load class C250 (250 kN)
- protection against vandalism thanks to lockable cover
- almost invisible when not in use
- almost maintenance-free and therefore operating costs

**Suitable for:**

- power
- water
- compressed air
- video, audio
- telematics

**Applications:**

- market places
- exhibition halls and trade fairs
- pedestrian zones
- hangars
- sport and leisure centres
- parks
- etc.

**Our service:**

- tailor-made, customised solutions
- manufacturing from small to large quantities
- lifetime availability of spare parts
- technical drawings
- installation instructions
- local support by our distribution partners

**What information is needed for bespoke design?**

GIFAS provides you with tailor made, project specific drawings and specifications. The following information is needed:

- type and number of outlets
- infos on MCB, RCD, RCBO etc.
- isolator switch needed?
- type and dimension of supply cable?
- max. prefuse?
- how shall the lid be filled (stone, asphalt, chequered plate steel insert)
- restrictions in mounting depth?
- requirements regarding max. load class (Campetto comes in C250 - 250 kN - 25 tons)

Please contact our local distribution partners, our Sales team or send an e-mail directly to: [export@gifas.ch](mailto:export@gifas.ch) for project specific enquiries.

**Example drawings**

On page 4-11 you can find 4 examples (1 example of each Campetto standard model).

**Realised projects in the Middle East**


Hundreds of GIFAS underfloor power distributors have been installed in the Middle East in the past 15 years. Contact us for the project list.



CAMPETTO comes as a ready-to-install unit, consisting of:

## 1. metal floor box

- made of stainless steel (1.4301 / AISI 314 / V2A)
- available in 4 standard dimensions (S, M, L or XL)
- with removable cable outlet (for closed operation)
- with bottom part (closed box model) or without bottom part (frame model)
- lid can be filled (50 mm) with stones, asphalt, wood, chequered plate insert, etc.
- with 2 gas springs

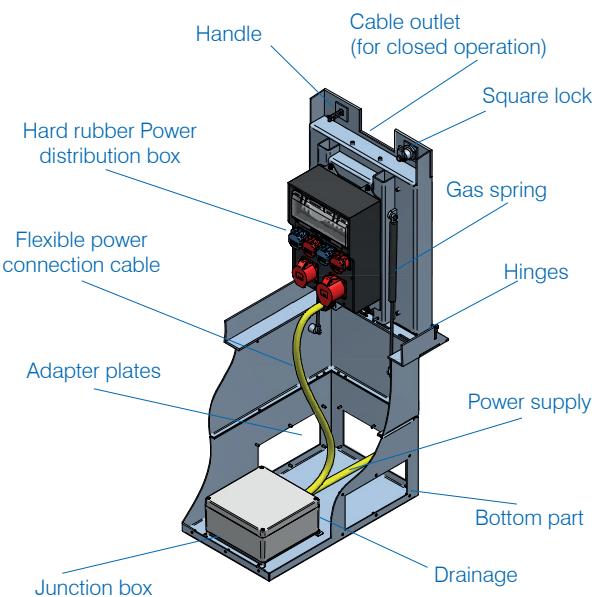


## 2. hard rubber power distribution box

- type according to your needs (type 7200, 7400, 7700, 7800...)
- for single-/three phase outlets (IP44 up to IP67)
- equipped with highly durable protective cover
- high impact resilience
- temperature resistance from -45°C to +80°C
- resistant to aging
- electrical strength 26'000V at a housing thickness of 10mm




## 3. connection box

- for easy connection of incomming cable
- throughwiring possible if necessary
- for outdoor installation (IP68) it shall be filled with 2 component silicone gel (Religel, Bluegel etc.)

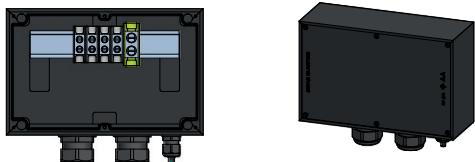


Square lock

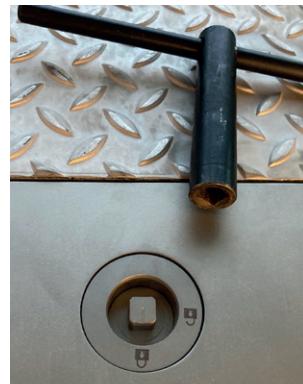

Handle



Cable outlet



Cable protection (optional)



Filable lid



Checkered plate insert (opt.)



Water tap (optional)



Adapter plates



Fuse cover



Gas springs



## Campetto S (Item no. 250521)

underfloor power distributor, C250, stainless steel 1.4301 (V2A), incl. hard rubber distribution box type 7200 and hard rubber junction box

Steel construction with lid that can be filled up with any material (e.g. concrete). Two gas springs for easy opening, hard rubber distribution box according to customer requirements. Construction in stainless steel 1.4301 (V2A), square lock 10 mm (incl. key), casing with closed bottom and hole Ø 50 mm for drainage  
operating mode: closed, load capacity C250.

**Mounting dim.: 560×310×650 mm** (Dimension of recess)

Vulcanized hard rubber power distribution box type 7200 with flap in Plexiglass, color casing: black RAL 9011, protection class casing: IP65





### Equipment:


- 1 socket CEE 16A 400V 3P+N+E IP67
- 1 MCB CLARIO 1N - 13A 'C' 6kA
- 1 RCBO CLARIO 3N - 16A/30mA 'C' 6kA
- 1 PTC heating 10W/230V
- 1 main line terminal LEIPOLD 5×(4-16mm<sup>2</sup>)
- 1 cable gland M16×1.5 IP68 (cable Ø 5-10mm)
- 1 angled cable gland M25×1.5 IP68 (cable Ø 13-18mm)

### Junction box:

- 1 hard rubber junction box type 1812
- 1 terminal block WOERTZ 5×10mm<sup>2</sup>
- 1 cable gland M16×1.5 IP68 (cable Ø 5-10mm)
- 2 cable glands M25×1.5 IP68 (cable Ø 13-18mm)

**Complete, ready for connection**

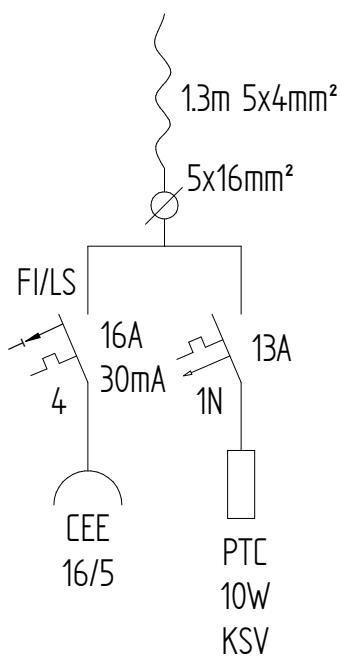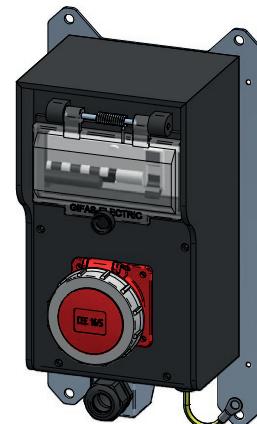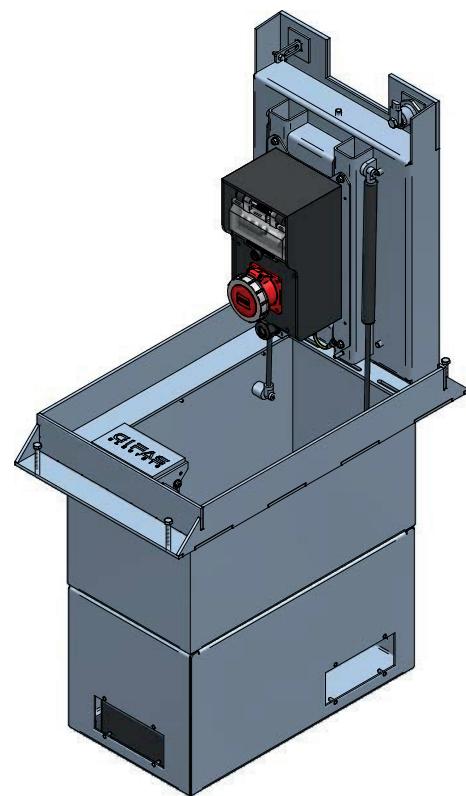

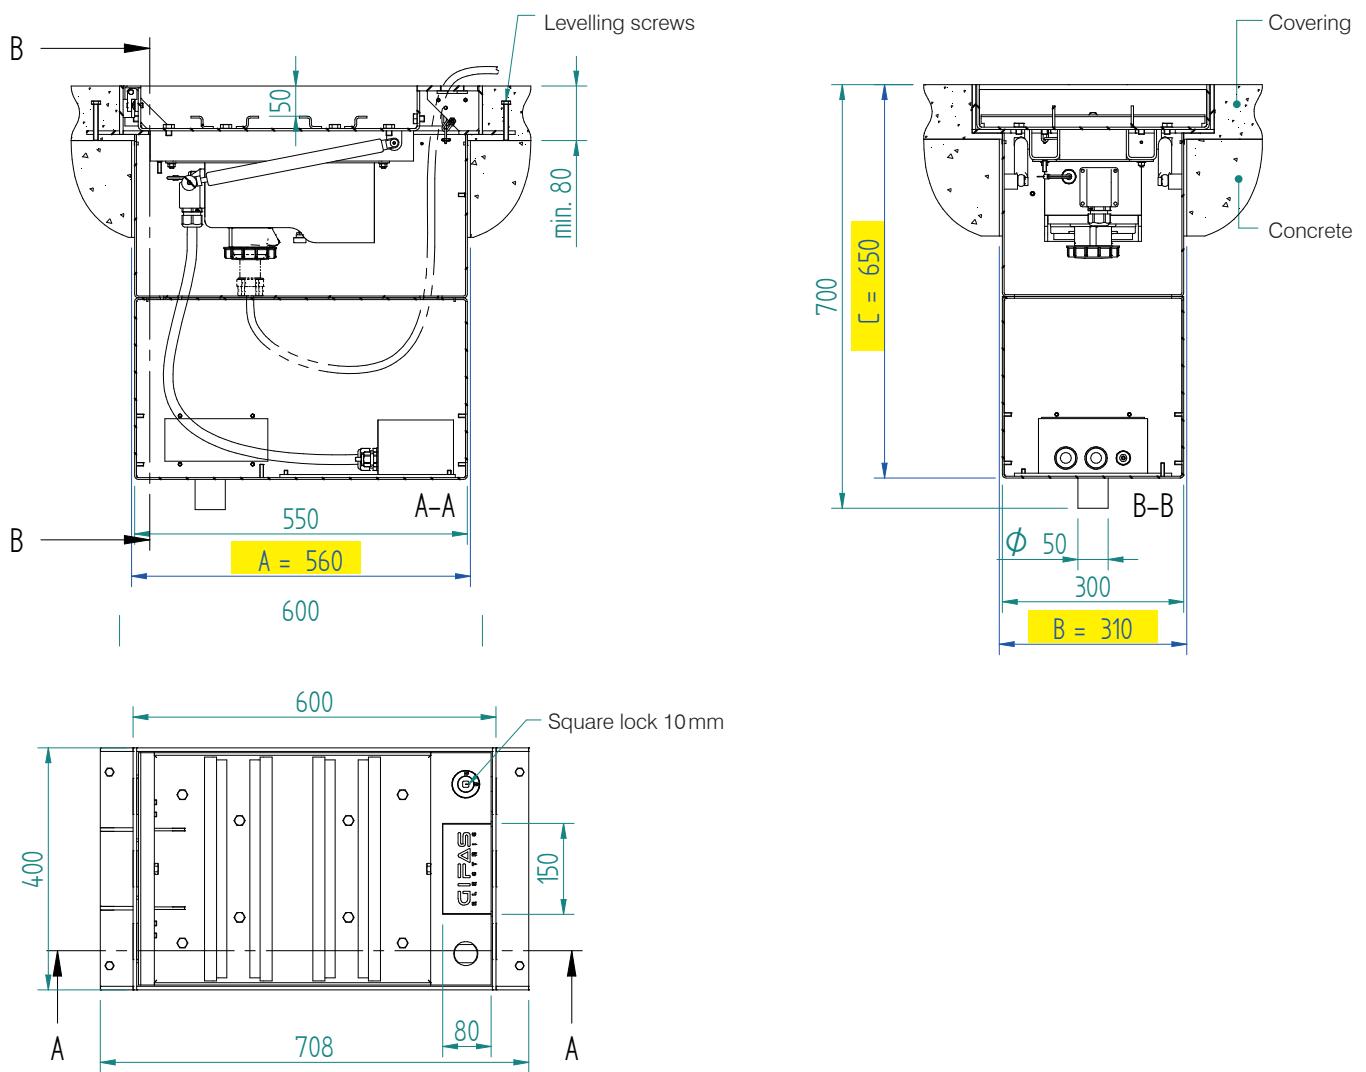

A×B×C   Dimension of recess

**Please note:**

The cover system is not sealed against surface water; drainage of the casing should be provided by the customer. The excavation work and the correct assembly of the construction (GIFAS components included) conforming to standards must be carried out by the customer.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max. load capacity 250kN) as well as professional connection to drainage system. See manual for more details.

**Campetto M** (Item no. 250524)

underfloor power distributor, C250, stainless steel 1.4301 (V2A), incl. hard rubber distribution box type 7400 and hard rubber junction box

Steel construction with lid that can be filled up with any material (e.g. concrete). Two gas springs for easy opening, hard rubber distribution box according to customer requirements. Construction in stainless steel 1.4301 (V2A), square lock 10mm (incl. key), casing with closed bottom and hole Ø 50 mm for drainage  
operating mode: closed, load capacity C250.

**Mounting dim.: 660×390×650 mm** (Dimension of recess)

Vulcanized hard rubber power distribution box type 7400 with flap in Plexiglass, color casing: black RAL 9011, protection class casing: IP65




**Equipment:**


1 socket British standard 13A 230V P+N+E IP66  
1 socket CEE 32A 400V 3P+N+E IP67  
4 sockets RJ45 Cat.6 IP67  
1 MCB CLARIO 1N - 13A 'C' 6kA  
1 RCBO CLARIO 1N - 13A/30mA 'C' 6kA  
1 RCBO CLARIO 3N - 32A/30mA 'C' 6kA  
1 PTC heating 10W/230V  
1 main line terminal LEIPOLD 5×(4-16mm<sup>2</sup>)  
5 cable glands M16×1.5 IP68 (cable Ø 5-10mm)  
1 angled cable gland M32×1.5 IP68 (cable Ø 18-25mm)

**Junction box:**

1 hard rubber junction box type 2516  
1 terminal block WOERTZ 4×16mm<sup>2</sup> + 1×35mm<sup>2</sup>  
1 cable gland M16×1.5 IP68 (cable Ø 5-10mm)  
2 cable glands M32×1.5 IP68 (cable Ø 18-25mm)

**Complete, ready for connection**

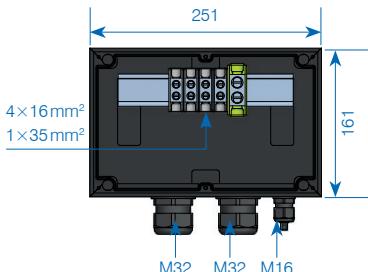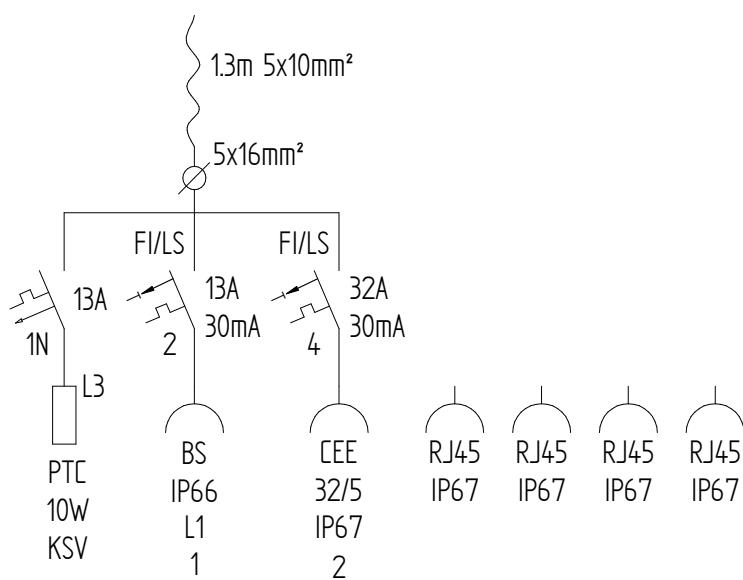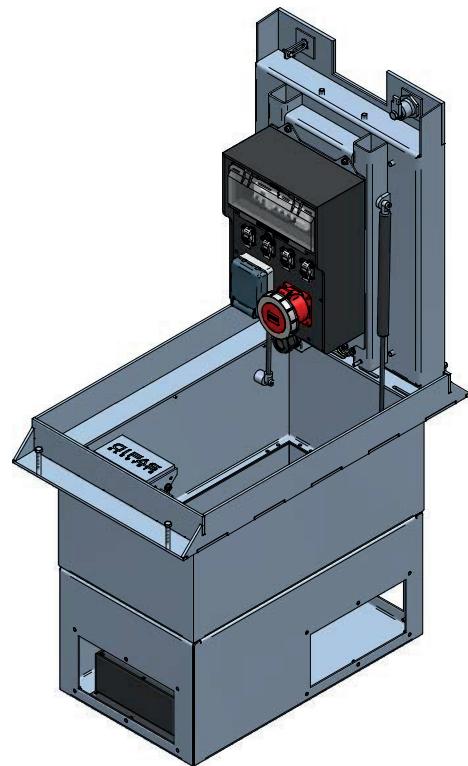

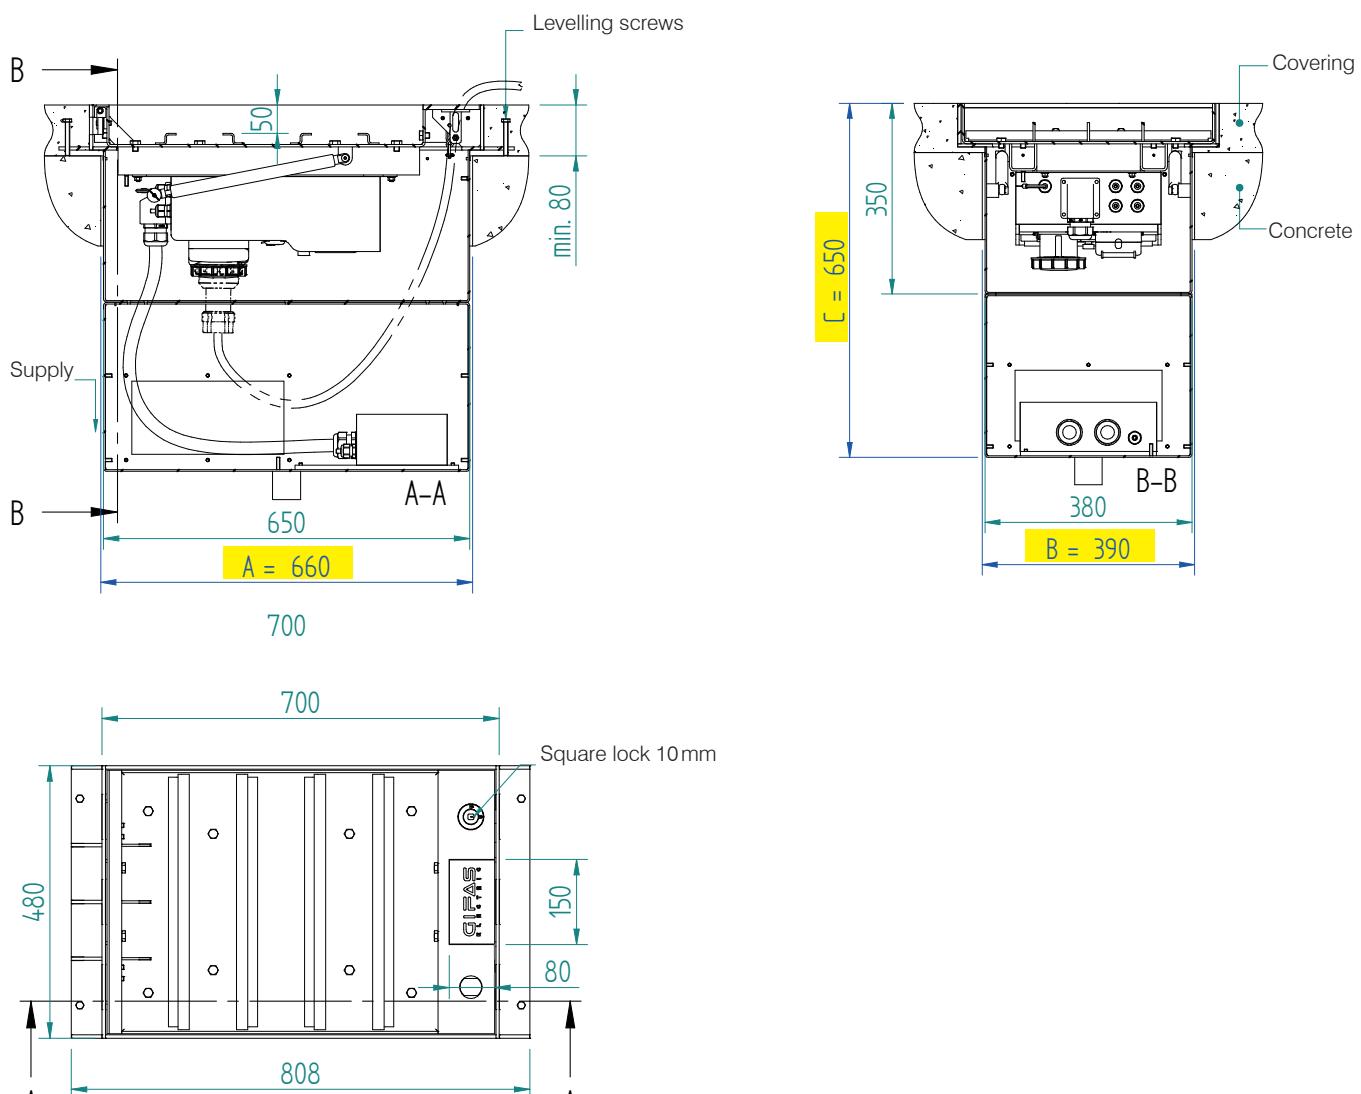

A×B×C   Dimension of recess

**Please note:**

The cover system is not sealed against surface water; drainage of the casing should be provided by the customer. The excavation work and the correct assembly of the construction (GIFAS components included) conforming to standards must be carried out by the customer.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max. load capacity 250kN) as well as professional connection to drainage system. See manual for more details.

## Campetto L (item no. 250526)

underfloor power distributor, C250, stainless steel 1.4301 (V2A), incl. hard rubber distribution box type 7700 and hard rubber junction box

Steel construction with lid that can be filled up with any material (e.g. concrete). Two gas springs for easy opening, hard rubber distribution box according to customer requirements. Construction in stainless steel 1.4301 (V2A), square lock 10 mm (incl. key), casing with closed bottom and hole Ø 50 mm for drainage  
operating mode: closed, load capacity C250.

**Mounting dim.: 660×460×650 mm** (Dimension of recess)

Vulcanized hard rubber power distribution box type 7700 with flap in Plexiglass, color casing: black RAL 9011, protection class casing: IP65





### Equipment:



1 socket British standard 13A 230V P+N+E IP66  
1 socket CEE 16A 400V 3P+N+E IP67  
1 socket CEE 32A 400V 3P+N+E IP67  
2 sockets RJ45 Cat.6 IP67  
1 MCB CLARIO 1N - 13A 'C' 6kA  
1 RCBO CLARIO 1N - 13A/30mA 'C' 6kA  
1 RCBO CLARIO 3N - 16A/30mA 'C' 6kA  
1 RCBO CLARIO 3N - 32A/30mA 'C' 6kA  
1 PTC heating 10W/230V  
1 main line terminal LEIPOLD 5×(4-16 mm<sup>2</sup>)  
3 cable glands M16×1.5 IP68 (cable Ø 5-10 mm)  
1 angled cable gland M32×1.5 IP68 (cable Ø 18-25 mm)

### Junction box:

1 hard rubber junction box type 2516  
1 terminal block WOERTZ 4×16 mm<sup>2</sup> + 1×35 mm<sup>2</sup>  
1 cable gland M16×1.5 IP68 (cable Ø 5-10 mm)  
2 cable glands M32×1.5 IP68 (cable Ø 18-25 mm)

**Complete, ready for connection**

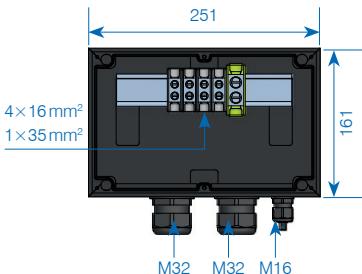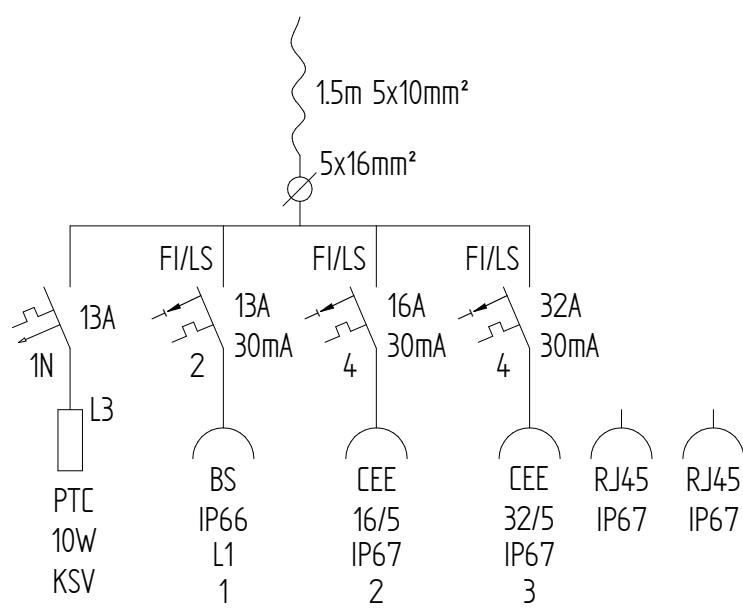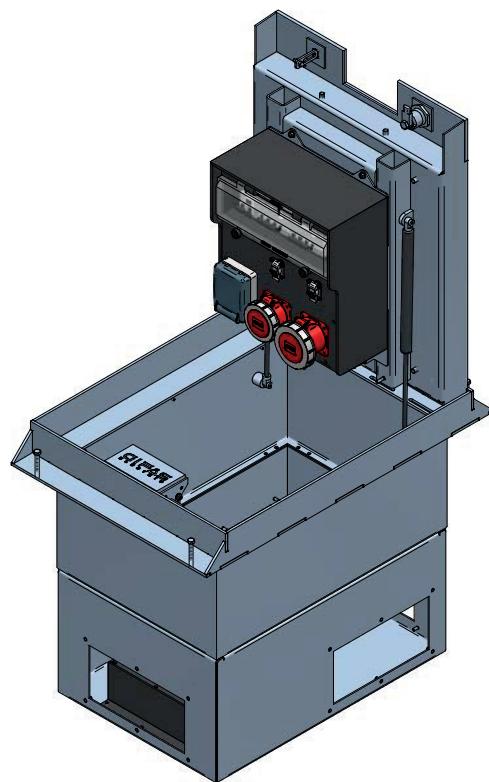

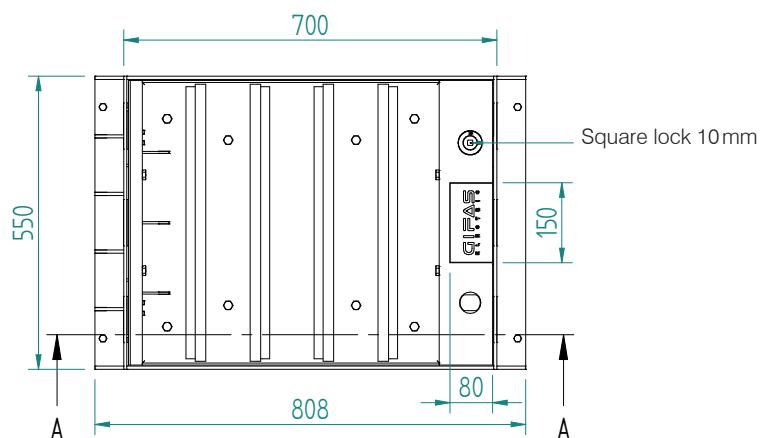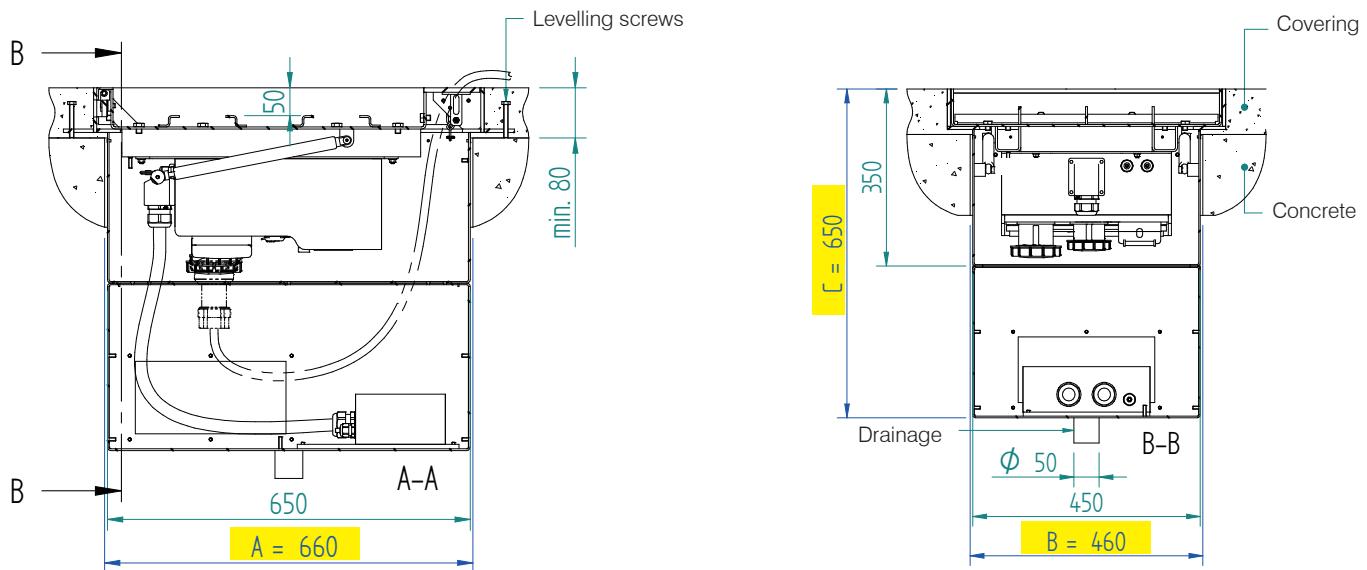

A×B×C   Dimension of recess

**Please note:**

The cover system is not sealed against surface water; drainage of the casing should be provided by the customer. The excavation work and the correct assembly of the construction (GIFAS components included) conforming to standards must be carried out by the customer.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max. load capacity 250kN) as well as professional connection to drainage system. See manual for more details.

## Campetto XL (Item no. 250531)

underfloor power distributor, C250, stainless steel 1.4301 (V2A), incl. hard rubber distribution box type 7800 and hard rubber junction box


Steel construction with lid that can be filled up with any material (e.g. concrete). Two gas springs for easy opening, hard rubber distribution box according to customer requirements. Construction in stainless steel 1.4301 (V2A), square lock 10 mm (incl. key), casing with closed bottom and hole Ø 50 mm for drainage  
operating mode: closed, load capacity C250.

**Mounting dim.: 860×510×750 mm** (Dimension of recess)

Vulcanized hard rubber power distribution box type 7800 with flap in Plexiglass, color casing: black RAL 9011, protection class casing: IP65

### Equipment:



1 socket British standard 13A 230V P+N+E IP66  
1 socket CEE 16A 400V 3P+N+E IP67  
1 socket CEE 32A 400V 3P+N+E IP67  
1 socket CEE 63A 400V 3P+N+E IP67  
2 sockets RJ45 Cat.6 IP67  
1 main switch 63A 3P  
1 MCB CLARIO 1N - 13A 'C' 6kA  
1 MCB SE 1N - 13A 'C' 6kA  
1 MCB SE 3N - 16A 'C' 6kA  
1 MCB SE 3N - 32A 'C' 6kA  
1 RCD SE 3N - 63A/30mA  
1 PTC heating 10W/230V  
1 main line terminal LEIPOLD 5×(4-16mm<sup>2</sup>)  
3 cable glands M16×1.5 IP68 (cable Ø 5-10mm)  
1 angled cable gland M32×1.5 IP68 (cable Ø 18-25mm)


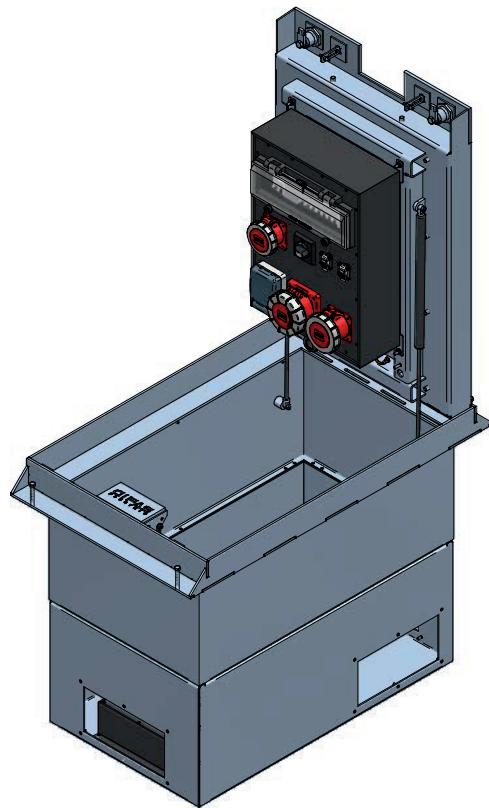


### Junction box:

1 hard rubber junction box type 2516  
1 terminal block WOERTZ 4×16mm<sup>2</sup> + 1×35mm<sup>2</sup>  
1 cable gland M16×1.5 IP68 (cable Ø 5-10mm)  
2 cable glands M32×1.5 IP68 (cable Ø 18-25mm)

### Complete, ready for connection

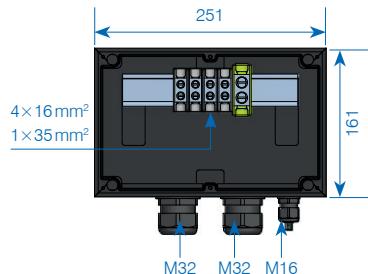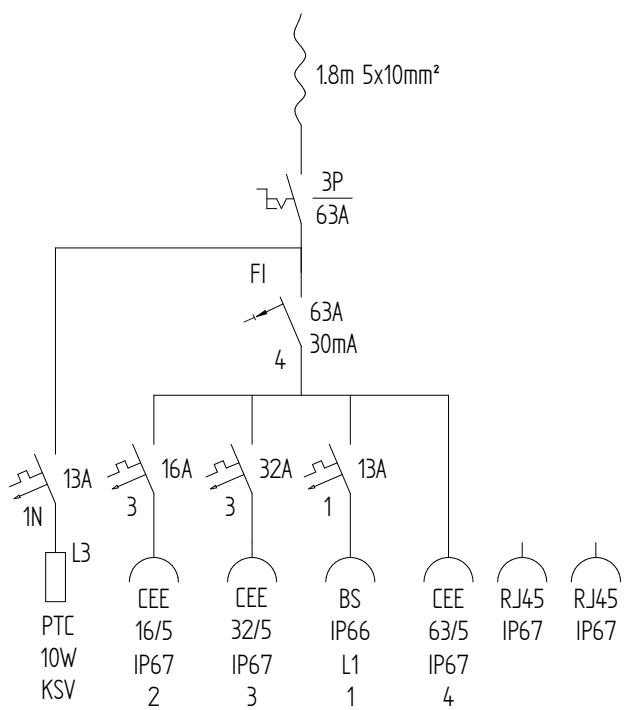

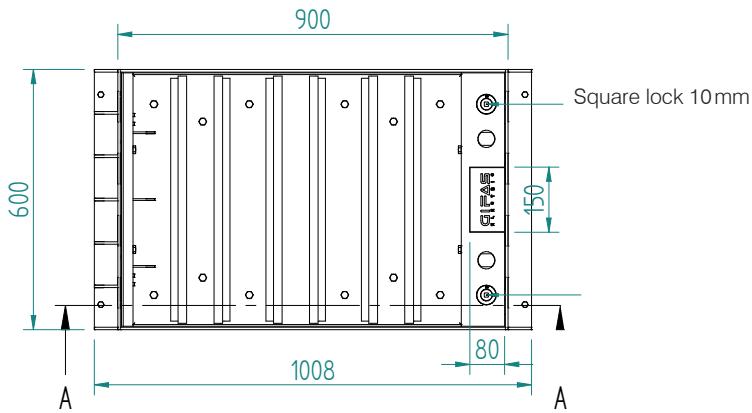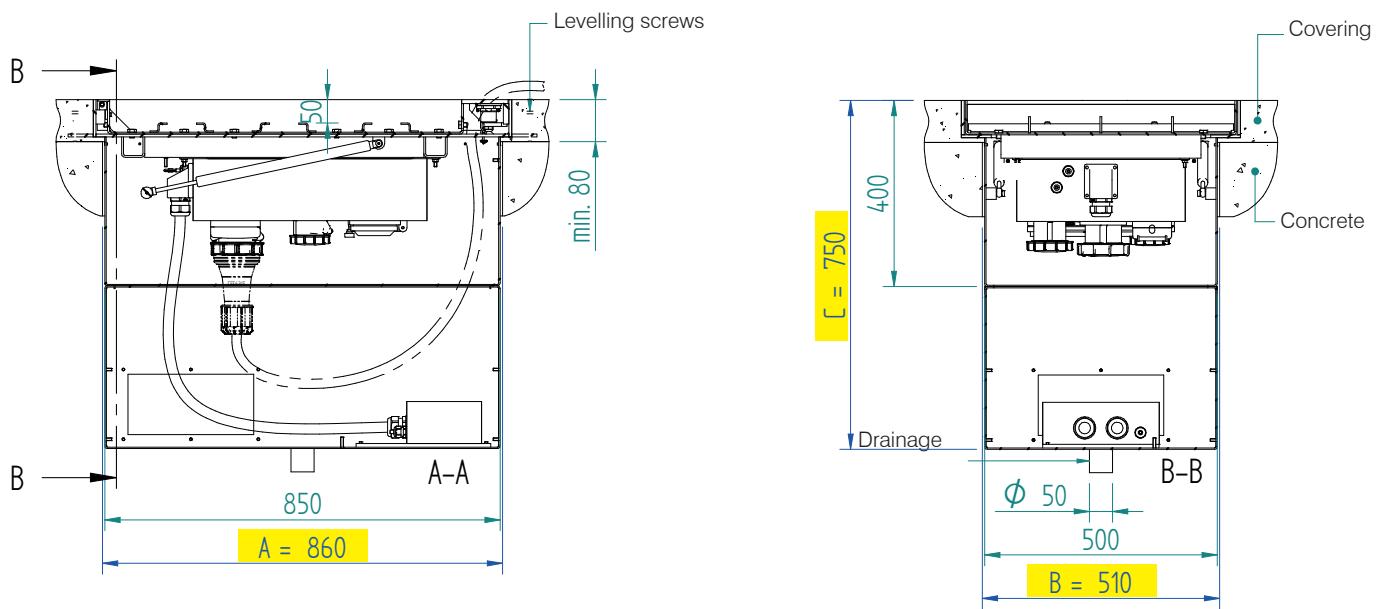

A×B×C   Dimension of recess

**Please note:**

The cover system is not sealed against surface water; drainage of the casing should be provided by the customer. The excavation work and the correct assembly of the construction (GIFAS components included) conforming to standards must be carried out by the customer.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max. load capacity 250kN) as well as professional connection to drainage system. See manual for more details.

GET IN TOUCH WITH US

News about the assortment and specific solutions  
you can find on our website:

[www.gifas.ch](http://www.gifas.ch)

We reserve the right to make technical modifications. V0124



**GIFAS**  
ELECTRIC

GIFAS-ELECTRIC GmbH  
Dietrichstrasse 2  
CH-9424 Rheineck  
Switzerland

📞 +41 71 886 44 44  
📠 +41 71 886 44 49  
✉️ export@gifas.ch  
🌐 www.gifas.ch