
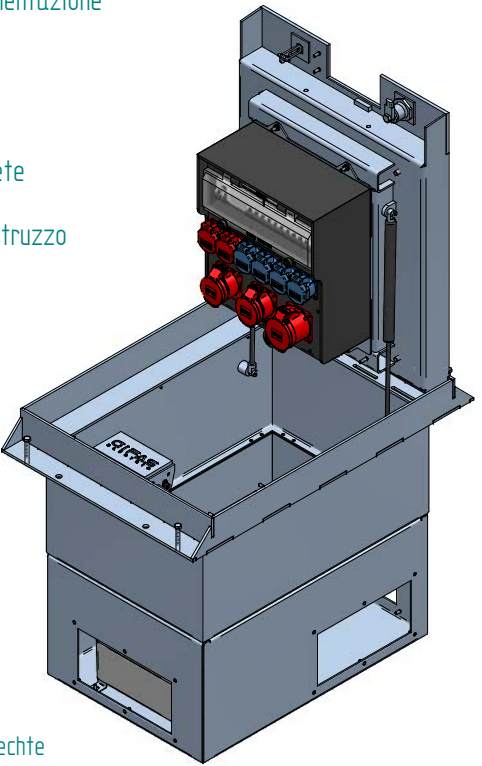


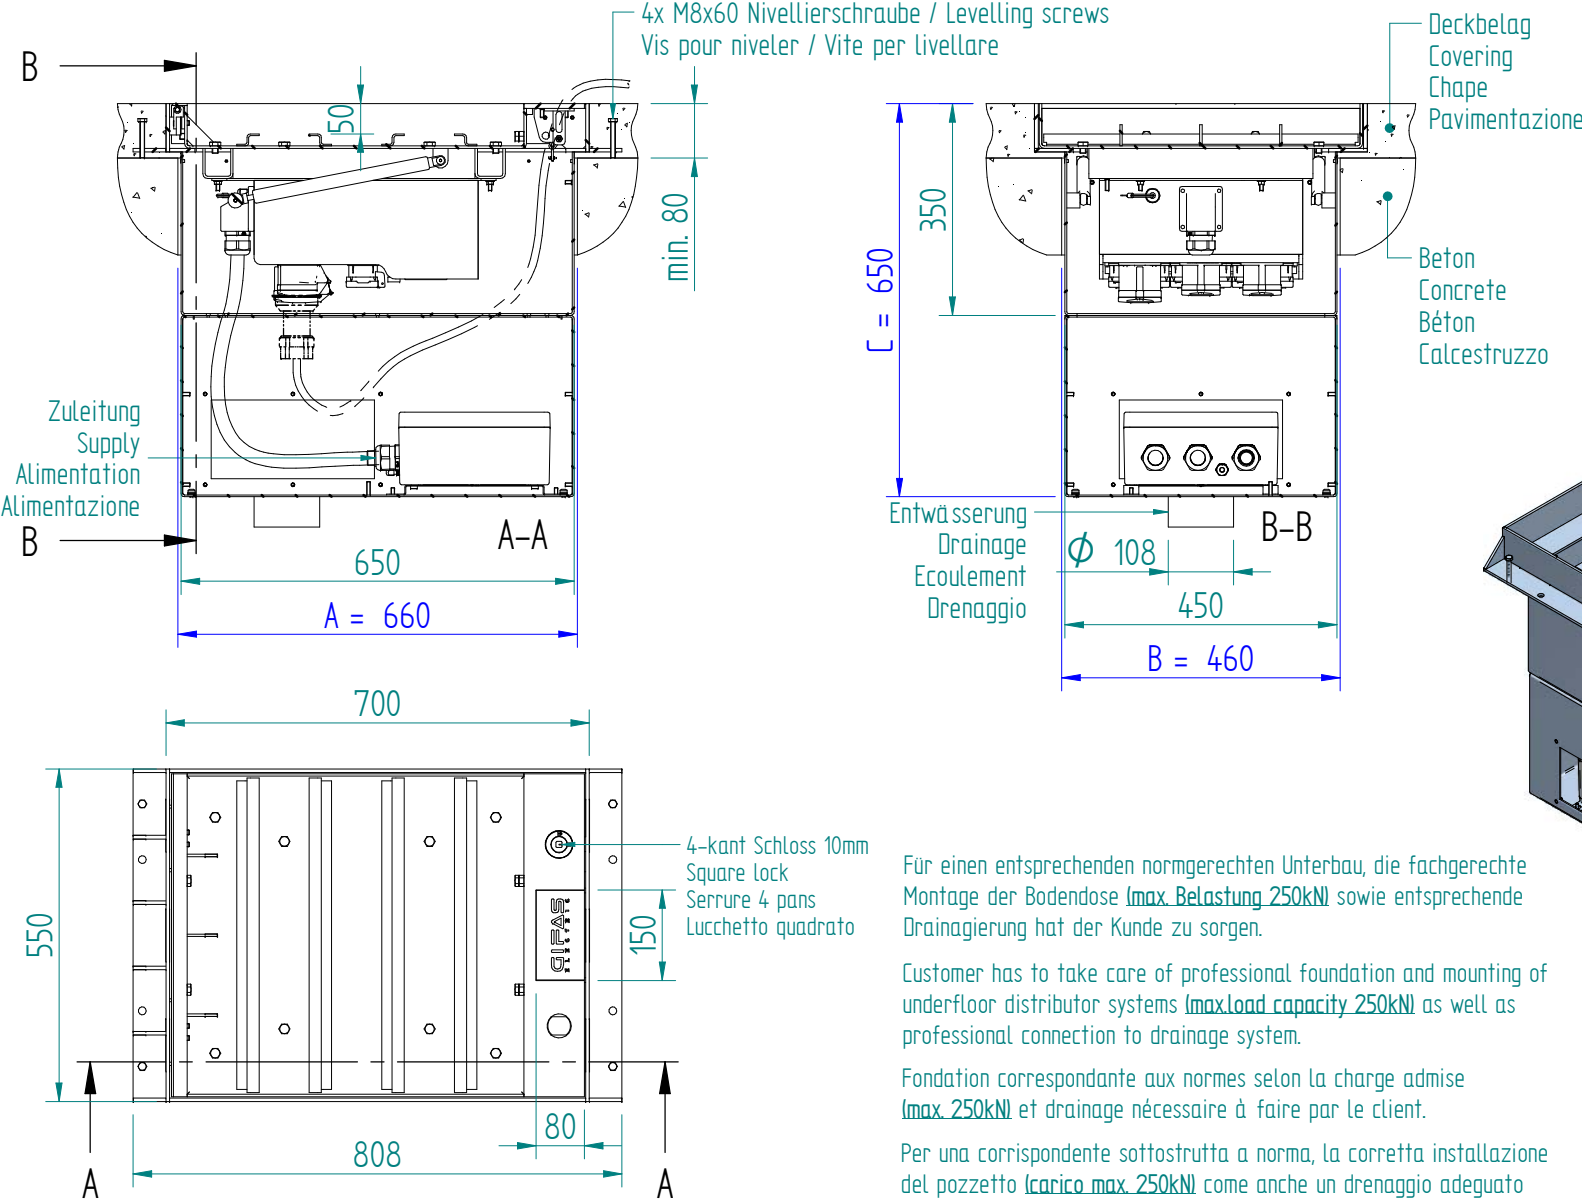

Für einen entsprechenden normgerechten Unterbau, die fachgerechte Montage der Bodendose (max. Belastung 250kN) sowie entsprechende Drainagierung hat der Kunde zu sorgen.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max load capacity 250kN) as well as professional connection to drainage system.

Fondation correspondante aux normes selon la charge admise (max. 250kN) et drainage nécessaire à faire par le client.

Per una corrispondente sottostruttura a norma, la corretta installazione del pozzetto (carico max. 250kN) come anche un drenaggio adeguato è a favore del cliente.

227016 KSV 7700 BG Campetto L
181810 Poly 2525 BG Anschlussdose

GIFAS ELECTRIC GIFAS-ELECTRIC GmbH Dietrichstrasse 2 - CH-9424 Rheineck  +41 71 886 44 44  info@gifas.ch  +41 71 886 44 44  www.gifas.ch	Unterflurelektrant Campetto L C250 KSV 7700	Art.-Nr. : 227026	
	01.09.2025	Blatt 1/1 beku	