
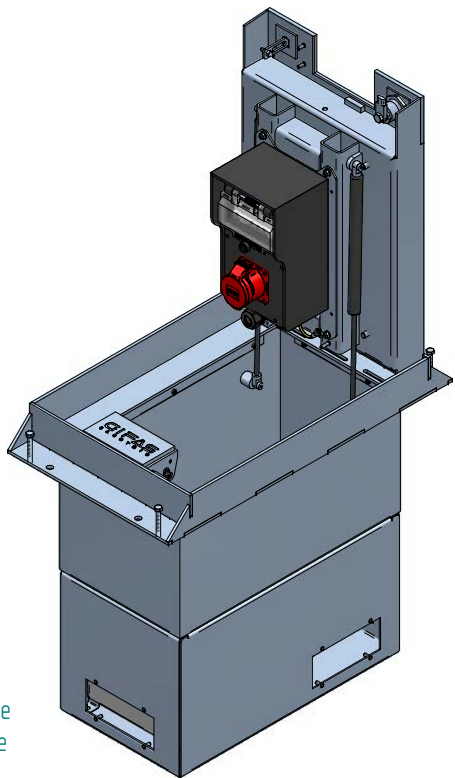


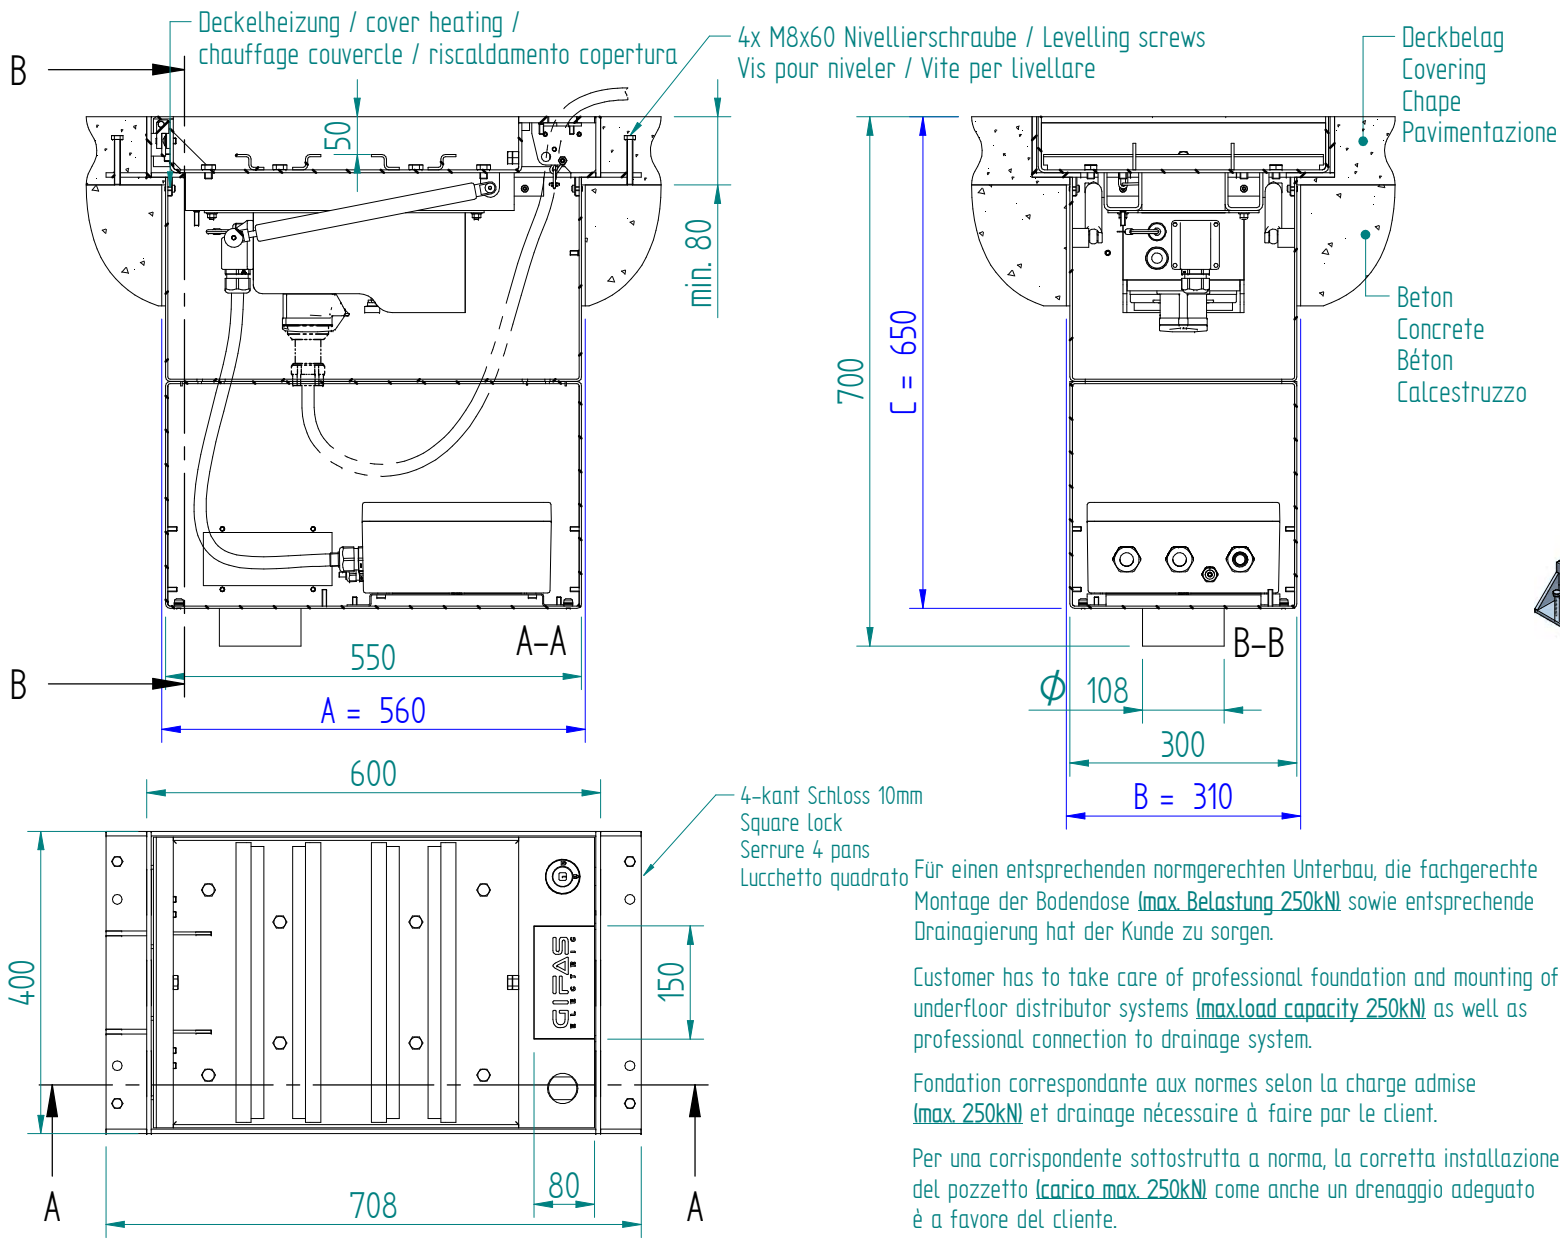

Für einen entsprechenden normgerechten Unterbau, die fachgerechte Montage der Bodendose (max. Belastung 250kN) sowie entsprechende Drainagierung hat der Kunde zu sorgen.

Customer has to take care of professional foundation and mounting of underfloor distributor systems (max.load capacity 250kN) as well as professional connection to drainage system.

Fondation correspondante aux normes selon la charge admise (max. 250kN) et drainage nécessaire à faire par le client.

Per una corrispondente sottostruttura a norma, la corretta installazione del pozzetto (carico max. 250kN) come anche un drenaggio adeguato è a favore del cliente.

251381 KSV 7200 BG Campetto S
230145 Poly 2525 BG Anschlussdose

A x B x C Aussparungsmasse
Dim. of Recess
Dim. maçonnerie
Dimensioni d'incasso

GIFAS ELECTRIC GIFAS-ELECTRIC GmbH Dietrichstrasse 2 - CH-9424 Rheineck  +41 71 886 44 44  info@gifas.ch  +41 71 886 44 44  www.gifas.ch	Unterflurelektrant Campetto S C250 KSV 7200	Art.-Nr. : 251982	
	10.07.2025	Blatt 1/1 beku	